


- A48SY-16C
- A48SY-25C
- A48SY-40C
- A48SY-64C
- A48SY-100C
- A48SB-64C
- A48SB-100C
- A48SY-16I
- A48SY-25I
- A48SY-40I
- A48SY-64I
- A48SY-100I
- A48SB-64I
- A48SB-100I
- A48SY-16V
- A48SY-25V
- A48SY-40V
- A48SY-64V
- A48SY-100V
- A48SB-64V
- A48SB-100V

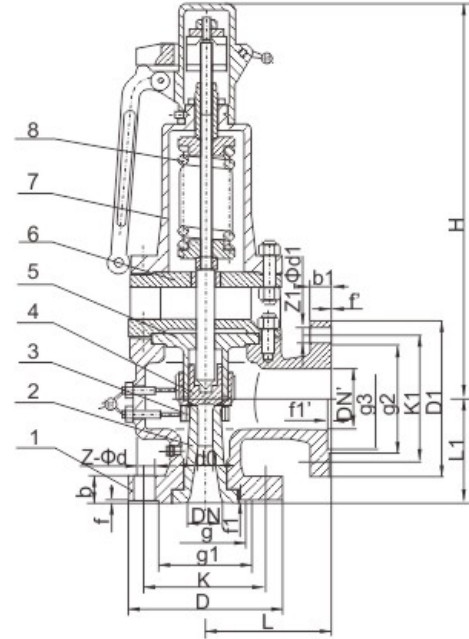

A48sH型

本阀门适用于工作温度
 "C型" ≤425°C;
 "I型" ≤500;
 "V型" ≤550°C
 的蒸汽等介质设备或管路上,
 作为超压保护装置。
 连接法兰标准按GB/T-9113, HG20592。

主要零部件材料

No.	零件名称	C型材料	I型材料	V型材料
1	阀体	WCB	ZG15Cr1Mo	ZG15Cr1Mo1V
2	阀座	2Cr13	12CrMo	12Cr1MoVX
3	调节圈	2Cr13	CF8	CF8
4	阀瓣	2Cr13	17-4PH	17-7PH
5	导向套	2Cr13	304	304
6	散热器	ZG230-450	WCB	WCB
7	阀盖	ZG230-450	WCB	WCB
8	弹簧	50CrVA	50CrVA	50CrVA

主要连接尺寸及外形尺寸

DN	d0	D	K	g	g1	b	f	f1	Z-Φd	DN'	D1	K1	g3	g2	b1	f'	f1'	Z1-Φb1	L	L1	≈H
A48SY-16C A48SY-16I A48SY-16V																					
40	25	150	110	-	85	18	3	-	4-18	50	165	125	-	100	20	3	-	4-18	120	115	540
50	32	165	125	-	100	20	3	-	4-18	65	185	145	-	120	20	3	-	4-18	135	120	618
65	40	185	145	-	120	20	3	-	4-18	80	200	160	-	135	20	3	-	8-18	160	140	710
80	50	200	160	-	135	20	3	-	8-18	100	220	180	-	155	22	3	-	8-18	160	150	730
100	65	220	180	-	155	20	3	-	8-18	150	285	240	-	210	24	3	-	8-23	225	175	892
150	100	285	240	-	210	24	3	-	8-23	200	340	295	-	265	26	3	-	12-23	230	215	1135
200	125	340	295	-	265	26	3	-	12-23	250	405	355	-	320	30	3	-	12-26	290	310	1240

主要连接尺寸及外形尺寸

DN	d0	D	K	g	g1	b	f	f1	Z-Φd	DN'	D1	K1	g3	g2	b1	f'	f1'	Z1-Φb1	L	L1	≈H
A48SY-40C A48SY-40I A48SY-40V																					
25	16	115	85	58	65	16	2	4	4-14	32	140	100	-	78	18	2	-	4-18	110	95	429
32	20	140	100	66	78	18	2	4	4-18	40	150	110	-	85	18	3	-	4-18	115	100	421
40	25	150	110	76	85	18	3	4	4-18	50	165	125	-	100	20	3	-	4-18	120	115	540
50	32	165	125	88	100	20	3	4	4-18	65	185	145	-	120	20	3	-	4-18	135	120	618
65	40	185	145	110	120	22	3	4	8-18	80	200	160	-	135	20	3	-	8-18	160	140	710
80	50	200	160	121	135	22	3	4	8-18	100	220	180	-	155	22	3	-	8-18	170	135	730
100	65	235	190	150	160	24	3	4.5	8-23	150	285	240	-	210	24	3	-	8-23	220	200	892
150	100	300	250	204	218	30	3	4.5	8-26	200	340	295	-	265	26	3	-	12-23	230	215	1135
200	125	375	320	260	282	38	3	4.5	12-30	250	405	355	-	320	30	3	-	12-26	290	310	1240
A48SY-64C A48SY-64I A48SY-64V A48SB-64C A48SB-64I A48SB-64V																					
25	16	140	100	58	78	22	2	4	4-18	32	140	100	66	78	18	2	4	4-18	110	100	429
32	20	155	110	66	82	24	2	4	4-23	40	150	110	76	85	18	3	4	4-18	130	110	421
40	25	170	125	76	95	24	3	4	4-23	50	165	125	88	100	20	3	4	4-18	135	120	540
50	32	180	135	88	105	26	3	4	4-23	65	185	145	110	120	22	3	4	8-18	160	130	618
50	32	180	135	88	105	26	3	4	4-23	80	200	160	121	135	22	3	4	8-18	160	145	710
65	40	205	160	110	130	28	3	4	8-23	80	200	160	121	135	22	3	4	8-18	175	160	710
80	50	215	170	121	140	30	3	4	8-23	100	235	190	150	160	24	3	4.5	8-23	175	160	730
100	65	250	200	150	168	32	3	4.5	8-26	125	270	220	176	188	28	3	4.5	8-25	220	200	800
100	65	250	200	150	168	32	3	4.5	8-26	150	300	250	204	218	30	3	4.5	8-26	220	200	892
150	100	345	280	204	240	38	3	4.5	8-34	200	375	320	260	282	38	3	4.5	12-30	280	280	1135
200	125	405	345	260	300	44	3	4.5	12-36	250	450	385	313	345	42	3	4.5	12-34	300	295	1135
A48SY-100C A48SY-100I A48SY-100V A48SB-100C A48SB-100I A48SB-100V																					
25	16	140	100	58	78	24	2	4	4-18	32	140	100	66	78	18	2	4	4-18	110	100	429
32	20	155	110	66	82	24	2	4	4-23	40	150	110	76	85	18	3	4	4-18	130	110	421
40	25	170	125	76	95	26	3	4	4-23	50	165	125	88	100	20	3	4	4-18	135	120	540
50	32	195	145	88	112	28	3	4	4-26	65	185	145	110	120	22	3	4	8-18	160	130	618
50	32	195	145	88	112	28	3	4	4-26	80	200	160	121	135	22	3	4	8-18	160	145	710
65	40	220	170	110	138	32	3	4	8-26	80	200	160	121	135	22	3	4	8-18	175	160	710
80	50	230	180	121	148	34	3	4	8-26	100	235	190	150	160	24	3	4.5	8-23	175	160	730
100	65	265	210	150	172	38	3	4.5	8-30	125	270	220	176	188	28	3	4.5	8-25	220	200	800
100	65	265	210	150	172	38	3	4.5	8-30	150	300	250	204	218	30	3	4.5	8-26	220	200	892
150	80	355	290	204	250	46	3	4.5	12-34	200	375	320	260	282	38	3	4.5	12-30	280	280	1135
200	125	430	360	260	312	54	3	4.5	12-36	250	450	385	313	345	42	3	4.5	12-34	300	295	1362