


● DZ40Y

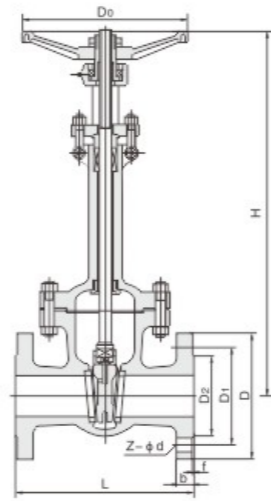

主要外形尺寸及连接尺寸

公称通径 DN	L	D	D1	D2	b	Z-φd	H	D0	
		DZ40Y-16C		DZ40Y-16P					
20	150	105	75	55	14	4-φ14	320	140	
25	160	115	85	65	14	4-φ14	350	160	
32	180	135	100	78	16	4-φ18	385	180	
40	200	145	110	85	16	4-φ18	420	200	
50	250	160	125	100	16	4-φ18	540	240	
65	265	180	145	120	18	4-φ18	610	240	
80	280	195	160	135	20	8-φ18	690	280	
100	300	215	180	155	20	8-φ18	780	300	
125	325	245	210	185	22	8-φ18	930	320	
150	350	280	240	210	24	8-φ23	980	360	
200	400	335	295	265	26	12-φ23	1180	400	
250	450	408	355	320	30	12-φ25	1390	450	
300	500	460	410	375	30	12-φ25	1620	560	
350	550	520	470	425	34	16-φ25	1810	640	
400	600	580	525	485	36	16-φ30	1970	640	
		DZ40Y-25C		DZ40Y-25P					
20	150	105	75	55	16	4-φ14	320	140	
25	160	115	85	65	16	4-φ14	350	160	
32	180	135	100	78	18	4-φ18	385	180	
40	200	145	110	85	18	4-φ18	420	200	
50	250	160	125	100	20	4-φ18	540	240	
65	265	180	145	120	22	8-φ18	610	240	
80	280	195	160	135	22	8-φ18	690	280	
100	300	230	190	160	24	8-φ23	780	300	
125	325	270	220	188	28	8-φ25	930	320	
150	350	300	250	218	30	8-φ25	980	360	
200	400	360	310	278	34	12-φ25	1180	400	
250	450	425	370	332	36	12-φ30	1390	450	
300	500	485	430	390	40	16-φ30	1620	560	
350	550	550	490	448	44	16-φ34	1810	640	
400	600	610	550	505	48	16-φ34	1990	640	

● DZ40Y

主要外形尺寸及连接尺寸

单位:mm

公称通径 DN	L	D	D1	D2	D6	B	Z-φd	H	D0
		DZ40Y-40C		DZ40Y-40P					
20	150	105	75	55	51	16	4-φ14	330	140
25	160	115	85	65	58	16	4-φ18	360	160
32	180	135	100	75	66	18	4-φ18	440	180
40	200	145	110	85	76	18	4-φ18	455	200
50	250	160	125	100	88	20	8-φ18	575	280
65	280	180	145	120	110	22	8-φ18	635	280
80	310	195	160	135	121	22	8-φ23	715	320
100	350	230	190	160	150	24	8-φ25	815	360
125	400	270	220	188	176	28	8-φ25	965	400
150	450	300	250	218	204	30	12-φ30	1025	400
200	550	375	320	282	260	38	12-φ34	1225	450
250	650	445	385	345	313	42	16-φ34	1440	560
300	750	510	450	408	346	46	16-φ34	1665	640
350	850	570	510	465	422	52	16-φ41	1880	640
400	950	655	585	535	474	58	Z-φd	2050	720
		DZ40Y-64C		DZ40Y-64P					
20	190	125	90	68	51	20	4-φ18	330	100
25	210	135	100	78	58	22	4-φ18	360	180
32	230	150	110	82	66	24	4-φ23	410	180
40	240	165	125	95	76	24	4-φ23	480	200
50	250	175	135	105	88	26	4-φ23	585	200
65	280	200	160	160	110	28	8-φ23	690	250
80	310	210	170	140	121	30	8-φ23	745	300
100	350	250	200	168	150	32	8-φ25	885	300
125	400	295	240	202	176	36	8-φ30	985	350
150	450	340	280	240	204	38	8-φ34	1050	350
200	550	405	345	300	260	44	12-φ34	1240	400
250	650	470	400	352	313	48	12-φ41	1460	560
300	750	530	460	412	364	54	16-φ41	1690	640
		DZ40Y-100C		DZ40Y-100P					
25	210	135	100	78	58	24	4-φ18	365	200
32	230	150	110	82	66	24	4-φ23	420	240
50	250	195	145	112	88	28	4-φ25	630	360
65	280	220	170	138	110	32	8-φ25	700	400
80	310	230	180	148	211	34	8-φ25	760	400
100	350	265	210	172	150	38	8-φ30	900	400

注：低温阀订货时注意工作温度，根据温度选用不同的材料。

闸阀系列

闸阀系列